



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRUF-1330B

我司品名:

OUR PART NAME

Clamping filter

送样日期:

DATE SAMPLES

数量:

0PCS

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
HuFangting	RaoPing	Li Zhengxiong

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

UF-1330B

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgement, please put forward or mark it and send it to our company. This acknowledgement will take effect one week after it is provided if you do not receive an objection reply.

东莞市祥如电子有限公司

Dongguan xiangru electronics co., ltd

Tel: 0769-86346548 Fax: 0769-86346358

email: dgxiangru@126.com


规格

SPECIFICATION

●型号 Type		XRUF-1330B					
●材质 Material		M8					
●尺寸 Dimensions (mm)							


测试报告

INSPECTION DATA

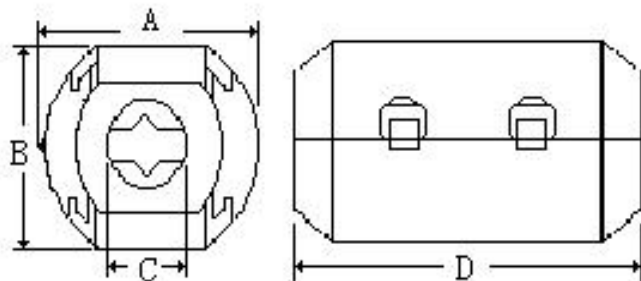product model	XRUF-1330B	texture of wood	M8	数量:10PCS			
client		日期			2021. 8. 09		
测试条件:	Φ 0. 65*120mm*1/2TS 25MHz/100MHz						
测试设备:	1. 数显游标卡尺 Digital vernier caliper 2. HP4191A						
序 号	A (mm)	B (mm)	C (mm)	D (mm)	Z		判定
	23±1. 00	22. 5±1. 00	13±1. 00	36±1. 00	25MHz	100MHz	
					60Ω MIN	105ΩMIN	
1	23.30	22.27	13.02	36.05	65.23	115.62	OK
2	23.25	22.32	13.06	36.05	68.51	110.36	OK
3	23.32	22.35	13.05	36.30	67.41	118.93	OK
4	23.26	22.39	13.02	36.28	66.32	117.82	OK
5	23.31	22.37	13.06	36.23	65.11	119.63	OK
6	23.25	22.17	12.99	35.12	64.82	115.43	OK
7	23.32	22.29	13.11	36.07	65.38	120.13	OK
8	23.34	22.28	13.07	36.09	66.37	119.71	OK
9	23.24	22.27	13.02	36.04	68.16	118.64	OK
10	23.2	22.32	13.12	36.2	67.55	114.63	OK
$\bar{X}$	23.28	22.30	13.05	36.04	66.49	117.09	OK
sampling plan	(参考GB/T2828. 1-2003)						
备 注 remarks							
INSPECTED		CHECKED			APPROVED		
LiYan		FanJin			ChenRongbin		

IMPEDANCE V.S FREQUENCY (Z-F)

CUSTOMER:					DATE	2021. 8. 09	
					TYPE	XRUF-1330B	
MATERIAL CHARACCTERISTICS							
MAATERIAL	INITIAL	PRACTICAL	RESIDUAL FLUX	TURATIONFL	MAGNETIZIN	CURIE TEMP	MATERIAL
	PERMEABILITY	PREQUENCY	DENSITY (Br)	DENSITY (Bs)	GFORCE		DENSITY
UNIT	UI	MHZ	GAUSS	GAUSS	Oested	℃	g/cm³
M8	850	0.1-1.5	1800	3100	0.48	140	5.0

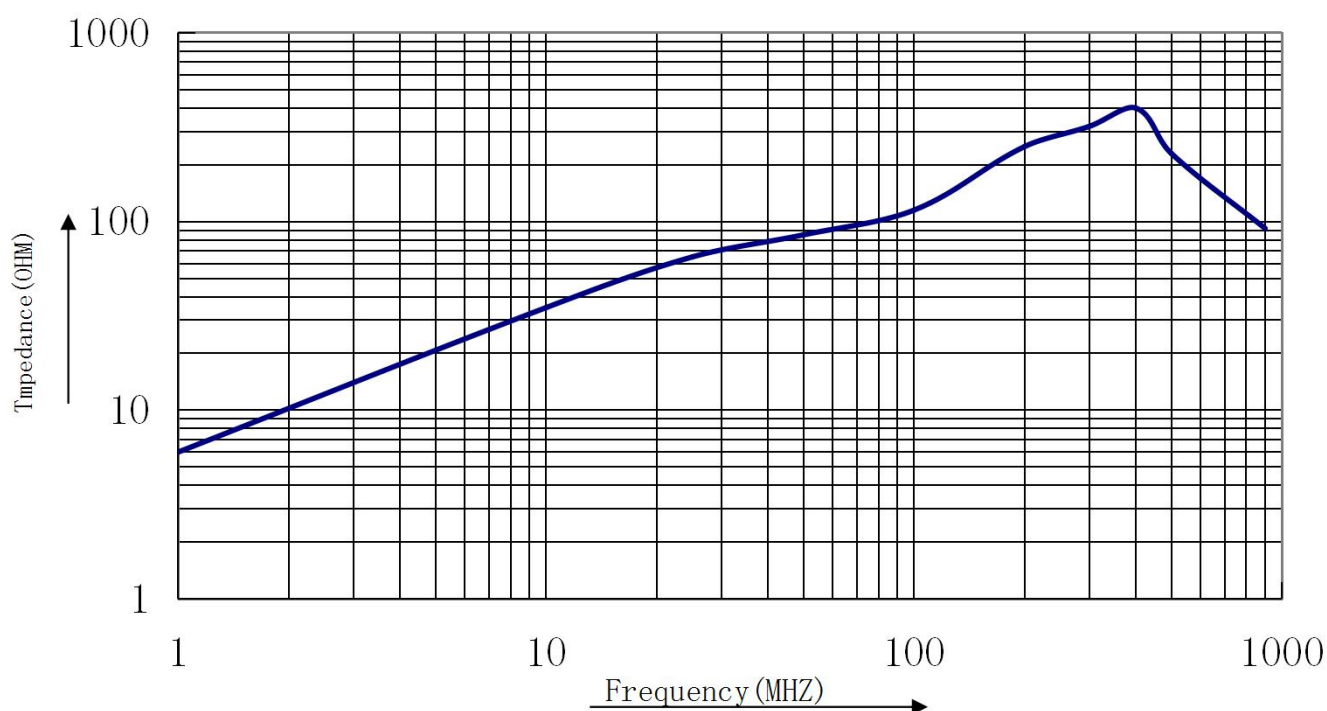

TESTING CONDITION:

1. Testing Equipment:

HP4191A

2. Testing Frequency Range:

1-1000MHz

3. Testing coil specification

Φ0.65 * 0.5Ts*120L (mm)

TESTED	CHECKED	APPROVED
LiYan	FanJin	ChenRong bin