



# 产品承认书

## SPECIFICATION FOR APPROVAL

客户名称: CUSTOMER \_\_\_\_\_

我司料号: XRRH3.5\*3.0\*0.8  
OUR PART NO. \_\_\_\_\_

我司品名: magnetic bead  
OUR PART NAME \_\_\_\_\_

送样日期: \_\_\_\_\_ 数量: 0PCS  
DATE SAMPLES \_\_\_\_\_ QUANTITY \_\_\_\_\_

<b>制造确认 MANUFACTURER APPROVE</b>		
拟制 DRAWN	审核 CHECKED	确认 APPROVED

<b>客户确认 CUSTOMER APPROVE</b>		
客户名称 CUSTOMER NAME:		
客户料号 CUSTOMER P/N:		
规格型号 DESCRIPTION: RH3.5*3.0*0.8 35Ω magnetic bead		
检查结果: <input type="checkbox"/> 合格 <input type="checkbox"/> 不合格		签名及盖章:
INSPECT RESULT ACCEPT REJECT		SIGNATURE AND STAMP
说明 REMARK:		

如对本承认书内容有异议请提出或标记发送至我司，本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

email: dgxiangru@126.com



ITEM	XRRH 3.5*3.0*0.8TAPING
PART NO.	
ELECTRICAL REQUIREMENTS	IMPEDANCE Z: 35 MIN OHM(100MHZ)

### TEST MEHOD

APPEARANCE STANDARD	VISION
INSPECTION LEVEL	MIL-SID-105D AQL=0.1
CHARACT&SIZE	LEVEL S-3
SURFACE	LEVEL II
TEST EQUIPMENT	HP-4191A
TEST FREQUENCY	100MHZ
COIL SPEC	

### DIMENSION

(UNIT:mm)

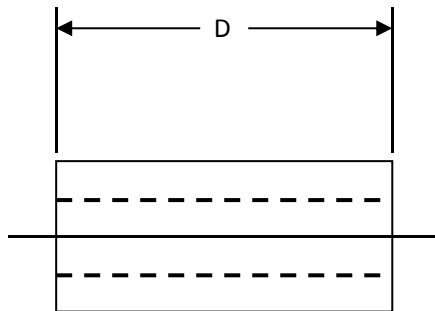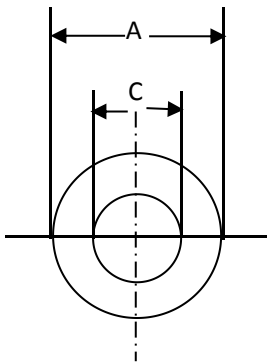

$$A=3.50 \pm 0.20\text{m/m}$$

$$C=0.80 \pm 0.20\text{m/m}$$

$$D=3.00 \pm 0.20\text{m/m}$$



ITEM	XRRH 3.5*3.0*0.8TAPING
PART NO.	

**PACKAGING**

Available in tape and reel bulk


**TAPE DIMENSION:**

TYPE	B	E	F	H	I	J	P	d1-d2
XRRH3.5*3.0*0.8	63.00	6.00	52.2	4.20	1.35	0.80	5.00	1.20
	±3.00	±0.50	±1.50	MIN	MAX	MAX	±0.50	MAX

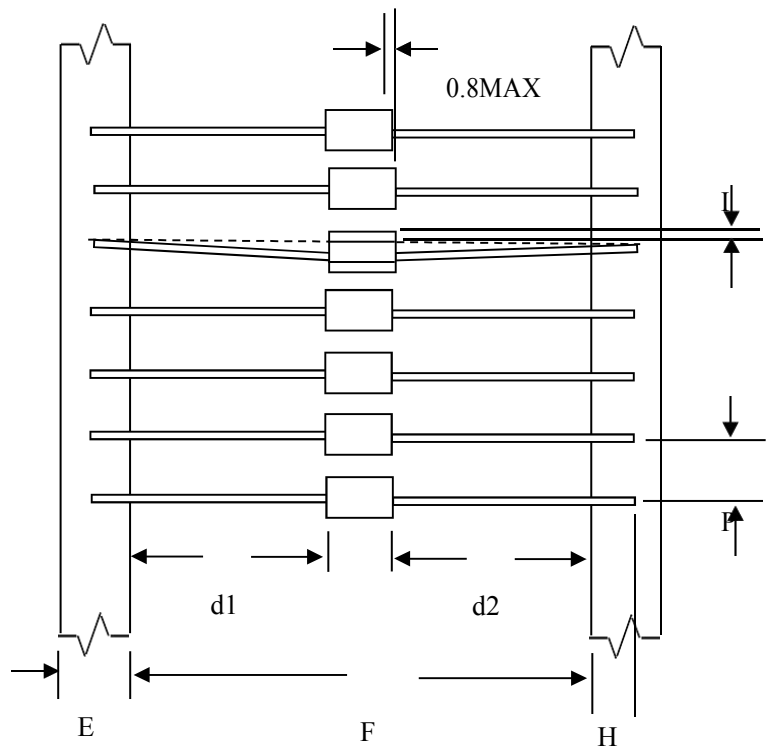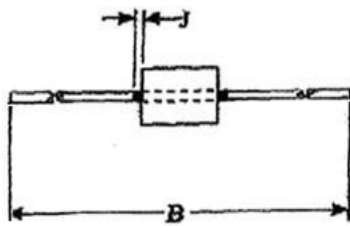


### TEST DATA

CUSTOMER		QUANTITY							
ITEM	XRRH 3.5*3.2*0.8 TAPING	COIL SPEC							
PART NO.		TEST FREQUENCY	100MHZ						
HUMIDITY	63%	TEST EQUIPMENT	HP-4191A						
TEMPERATURE	23°C								
	TEST RESOLUTION		DIMENSION (UNIT:mm)						
	Z MHZ	Z1 MHZ	Z2 100MHZ	A	B	C	D	E	F
SPEC	Ω MIN	Ω MIN	35 Ω MIN	3.50 ±0.20		0.80 ± 0.20	3.00 ±0.20		
1			38	3.45		0.80	3.20		
2			37	3.48		0.85	3.12		
3			41	3.50		0.90	3.15		
4			39	3.52		0.98	3.18		
5			42	3.55		0.99	3.19		
6									
7									
8									
9									
10									
MEAN									
R									

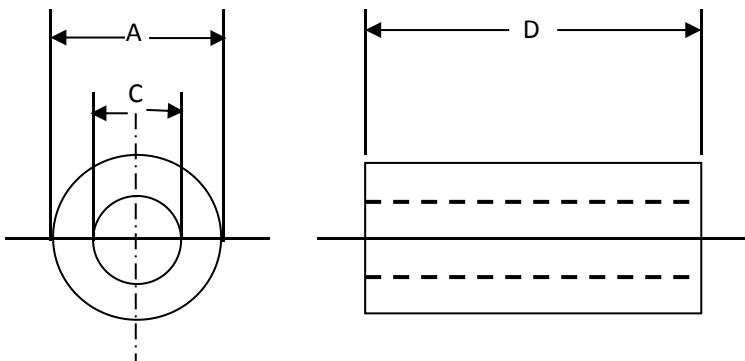

ITEM: XRRH 3.5\*3.0\*0.8 TAPING

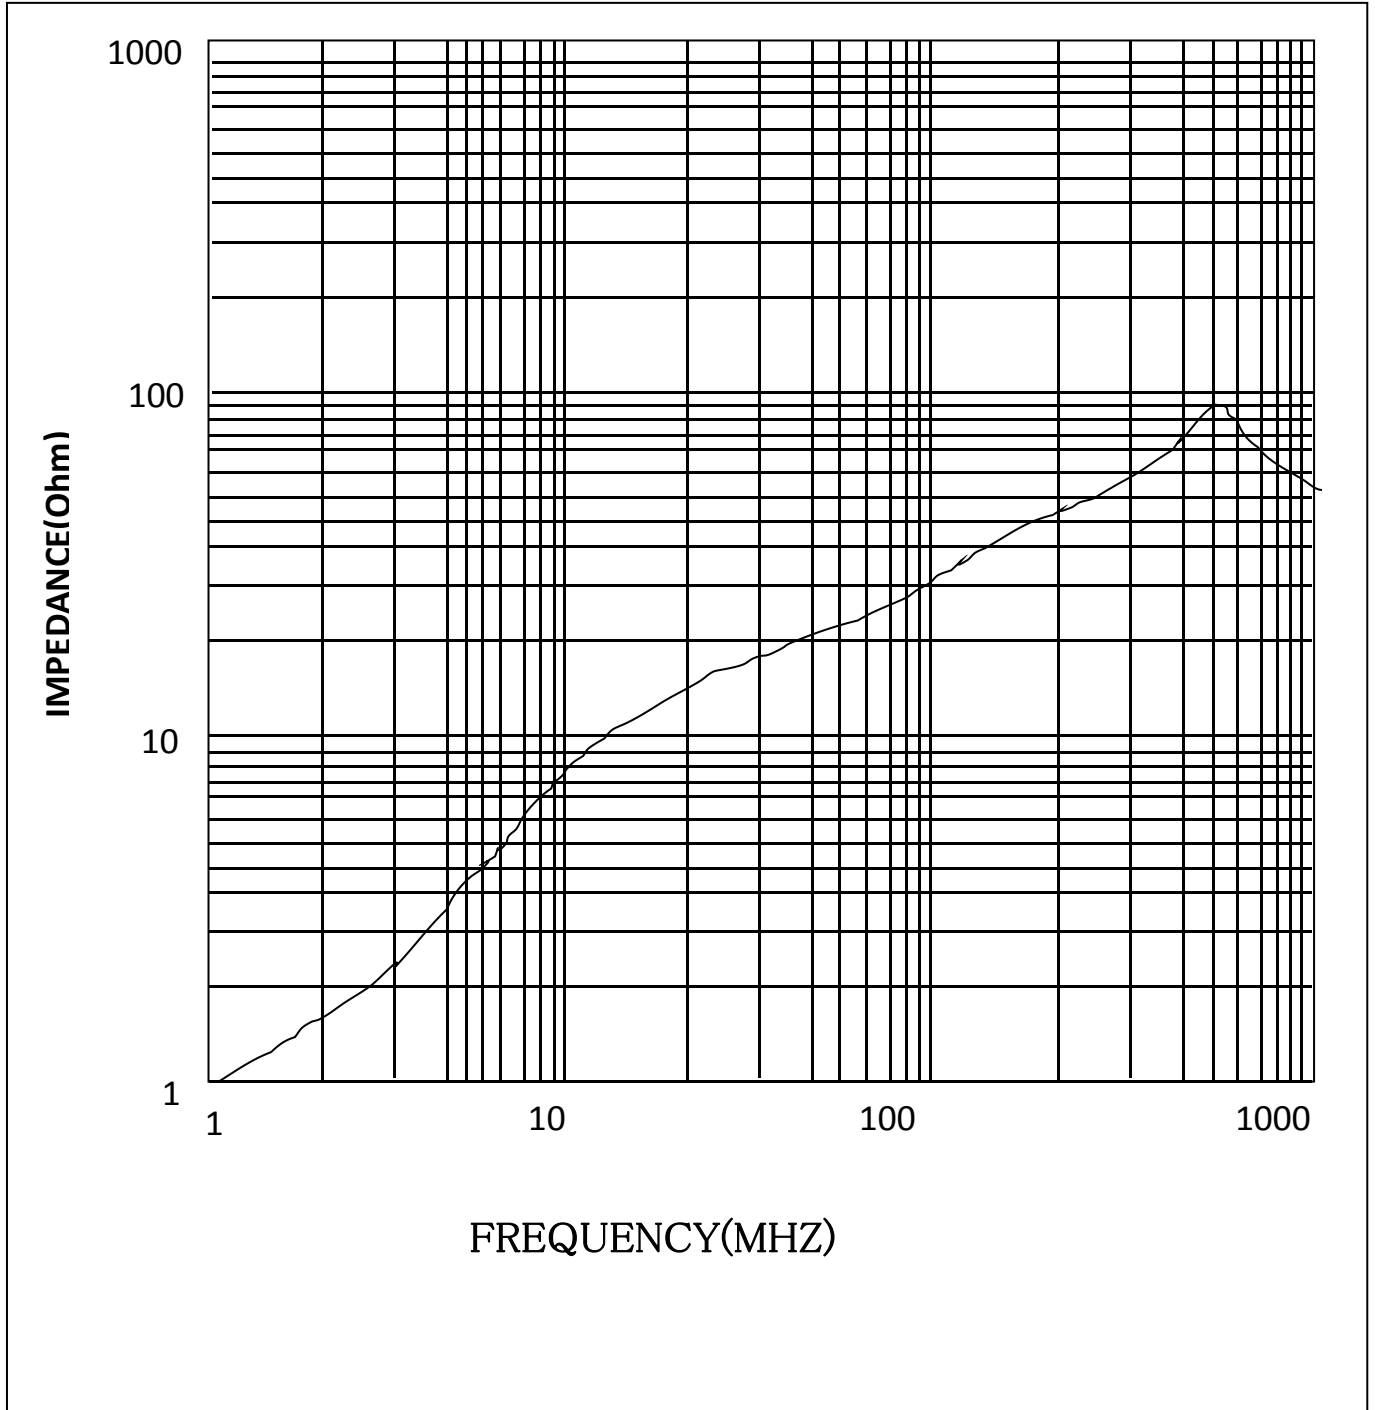

METER: HP-4191A