



产品承认书
SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRRH3.5*4.7*0.8*2

我司品名:

OUR PART NAME

magnetic bead

送样日期:

DATE SAMPLES

数量:

0PCS

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN

审核 CHECKED

确认 APPROVED

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

RH3.5*4.7*0.8*2 80Ω magnetic bead

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO.,LTD

Tel: 0769-86346548 Fax: 0769-86346358

email: dgxiangru@126.com

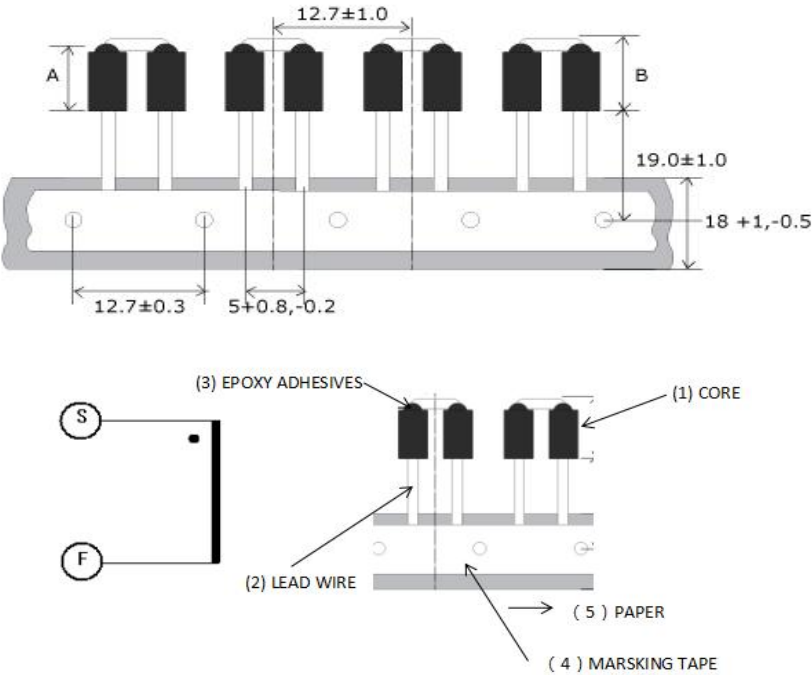
产 品 承 认 书

禁止使用危害物质

客户料号 (CUSTOMER P/N):		XRRH3. 5*4. 7*0. 8*2			
料号 (ITEM):		XRRH3. 5*4. 7*0. 8*2			
发行号 (SPEC NO):		APL001-SPEC-005			
版本号 (REVISION):		A			
日期 (DATE):		2022. 08. 15			
变更记录 change record					
REVISION	change the date	Change content	revise	check	
First issue					
Important control item					
1、Products are required to be environmentally friendly and halogen-free.					
2、The product body shall be free from damage and cracks, and shall not be stained with foreign materials such as glue.					
3、PIN must be bright, free from glue, and free from copper exposure (thread damage), oxidation and other defects.					
4、The product size must meet the requirements.					
Fiction:	Ouyang Yunbin	Audit:	Cheng Hui		

material code	XRRH3.5*4.7*0.8*2	REVISION	A	DATE	2022.8.15
---------------	-------------------	----------	---	------	-----------

一、MECHANICAL DIMENSIONS(外观尺寸图)：UNIT(单位)：mm(毫米)

 The mechanical drawing shows a component with six cylindrical posts. Dimensions include: post diameter 12.7±1.0, post pitch 12.7±0.3, post height 19.0±1.0, base thickness 18+1,-0.5, and a central slot width of 5+0.8,-0.2. A cross-sectional diagram labels: (1) CORE, (2) LEAD WIRE, (3) EPOXY ADHESIVES, (4) MARKING TAPE, and (5) PAPER. A circuit diagram shows terminals S and F.	project	规格(mm)	实测(mm)
	A	4.7±0.25	4.75
	B	7.0Max	5.75

二、WINDING SPECIFICATION(绕线规格)：

win ding	post		Wire specification	cylinder number	Winding requirements
	begin	end			
N1	S	F	CP WIRE0.60mm	0.5TS	

三、ELECTRICAL CHARACTERISTICS(电器特性)：

project	specifications	tolerance	measured value	Test frequency	remarks
Z(Ω)	80	Min	105	100MHZ	HP-4286A

ITEM	XRRH3. 5*4. 7*0. 8*2	REVISION: A	DATE:	2022. 8. 15
四、MATERIAL LIST(材料表)：				
name	specifications	dosage	unit	remarks
magnetic core	RH3. 5*4. 7*0. 8	2	PCS	
tinned wurd	CP WIRE0. 60mm		g	
glue	FK661		g	
Carrier tape	11mmX500m	1	PCS	
paper tape	18mm*0. 47	1	PCS	
五、PACKING(包装要求)：				
QTY				
内盒（PCS）	1内盒/2000PCS			
外箱（PCS）	10内盒/1外箱/20000PCS			