



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

ES81002H

我司品名:

OUR PART NAME

Lan Transformer

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
ZhaoYinyin	RaoPing	ZhongCuilan

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

ES81002H

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Email: dgxiangru@126.com


产品承认书 SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2025/07/20
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	ES81002H
我司物料编号 OUR PART NO	ES81002H	我司品名 OUR PART NAME	Lan Transformer

Parametertable(特性参数):

Part No	Inductance OCL			TurnRatio($\pm 3\%$)		DCResistance			Polarity	TurnRatio 1mA60S
	100KHz0.1V(1-3)	100KHz0.1V(4-6)	100KHz0.1V(7-9)	1-3: 4-6	1-3: 7-9 M	Max(1-3)	Max(4-6)	Max(7-9)		
ES81002H	120uHMin	2.0uHMin	130uHMin	1:0.2 $\pm 3\%$	1:1.1 $\pm 3\%$	0.55 Ω	0.12 Ω	0.6 Ω	1-4-7	1000VAC

Mechanical(外观尺寸图):

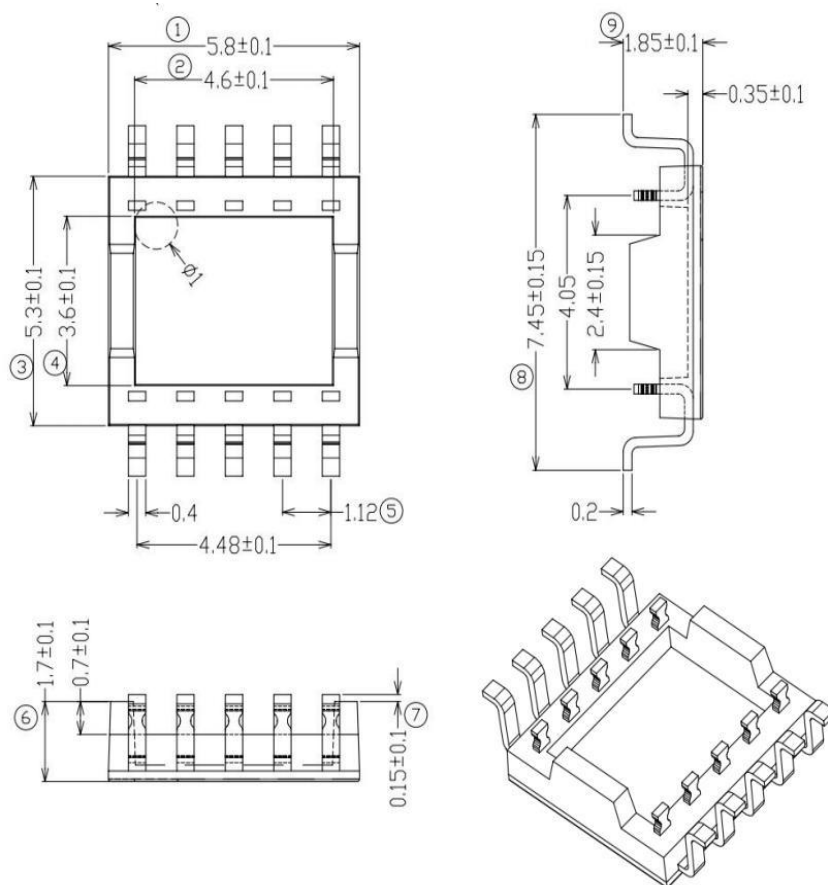

1特点Features:

1.1: 符合IEEE802.3和ANSIX3.263标准和RoHS标准。Meets IEEE802.3 and ANSI X3.263 standards

1.2: RoHS Compliant. 符合ROHS标准

1.3: 工作温度范围:0℃至+70℃。Operating temperature range:0℃to+70℃


1.4: 存储温度范围:-40℃至+85℃。Storage temperature range:-40℃to+85℃

产品承认书


SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2025/07/20
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	ES81002H
我司物料编号 OUR PART NO	ES81002H	我司品名 OUR PART NAME	Lan Transformer

SCHEMATICS (原理图) :

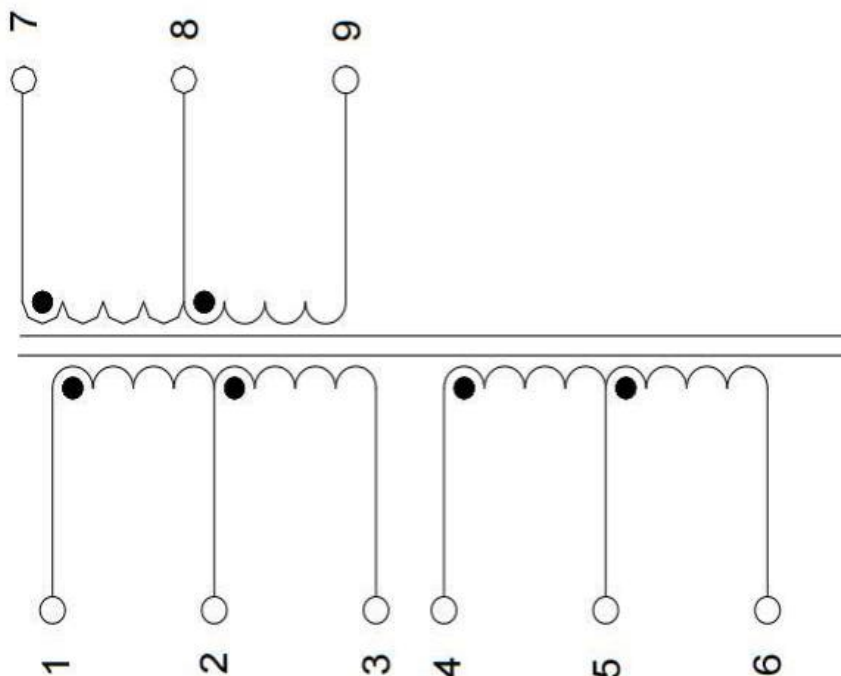

Packaging information:

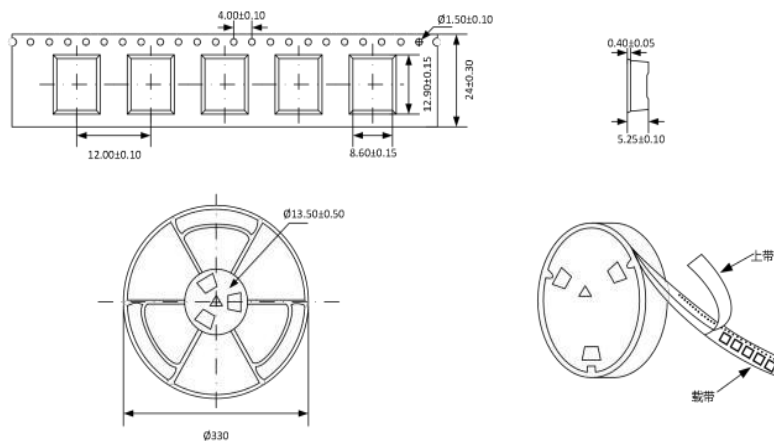

※ Unit: mm

※ Packaging quantity (MOQ): * pcs/roll * pcs/box